

PARTS LIST FOR MODEL C9-9MM OR CF 380-380 A.C.P.

- | | |
|-----------------------------|------------------------------------|
| 1. Ejection Pin | 19. Grip Screw (2) |
| 2. Ejection Key | 20. Grip (2) |
| 3. Ejection Spring | 21. Magazine Catch Assembly |
| 4. Slide | 22. 8 Shot Magazine Assembly |
| 5. Firing Pin | 23. Sear Block Spring |
| 6. Firing Pin Spring | 24. Sear Block |
| 7. Firing Pin Spring Cup | 25. Counter Weight Pivot Pin |
| 8. Slide Retainer | 26. Counter Weight |
| 9. Slide Retainer Pin | 27. Magazine Catch Spring |
| 10. Sear Spring | 28. Adjustable Rear Sight Assembly |
| 11. Sear Cam | 29. Elevation Screw |
| 12. Sear Assembly | 30. Sight Pivot Screw |
| 13. Safety | 31. Adjustable Sight Spring |
| 14. Frame | 32. Hold Open Pin |
| 15. Recoil Spring | 33. Hold Open |
| 16. Recoil Spring Guide Rod | 34. Hold Open Spring |
| 17. Trigger Pin | 35. Magazine Lockout |
| 18. Trigger Assembly | 36. Magazine Lockout Spring |

To order extra magazine send money order for \$15.00 per magazine (includes shipping & handling) to: Beemiller Inc., 1015 Springmill Road, Mansfield OH 44906

Visa and MasterCard accepted.

Prices available upon request.


Changes in design may occur from time to time. Always specify the serial number of your pistol with your inquiry.

Care and Use / Maintenance

Slide can be locked open by moving slide to rearmost position and at this time pushing safety lever up into the notch in the slide. Breech, chamber, and barrel inspection and cleaning is easily performed in this position. Barrel should be brushed every 300 - 400 rounds. Complete disassembly and cleaning should be performed at 1500 - 2000 rounds.

DISASSEMBLY

Pistol must be unloaded to perform disassembly. Move slide to rearmost position, exposing slide retainer pin. Using a 1/8" pin punch, remove retainer pin from frame. Lift slide up until it stops. Hold rear of slide up and push forward; this removes slide assembly from frame. Reassemble by reversing disassembly procedure.

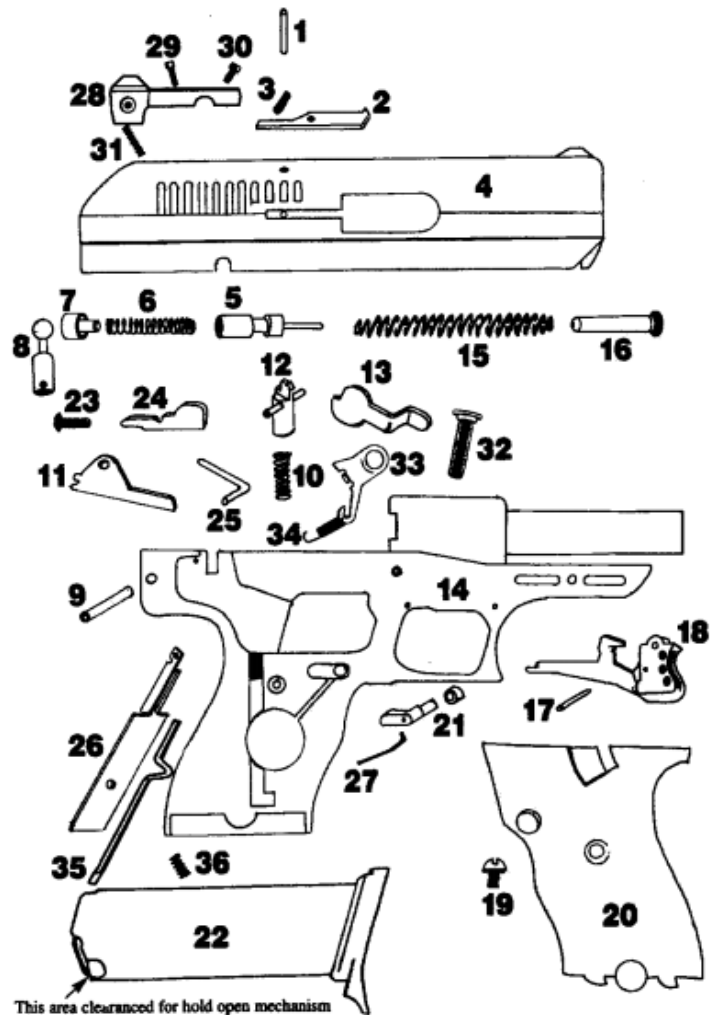

ATTENTION: This pistol is equipped with a last round hold open mechanism. Older Hi-Point magazines may not have the proper clearance for this mechanism. Uncleared magazines **WILL DAMAGE** the frame if forced into the pistol.