

Download or Print Instructions | Contact: help@mcarbo.com | Page 1





You must be 18 yrs of age to purchase. We advise that all parts purchased from our inventory be installed and inspected by a qualified gunsmith. Modifying your weapon may be prohibited in your state. Do not modify your sear or hammer engagement surfaces. Before installing please be sure to check all local state and federal laws. By installing this part you agree to take full responsibility for any and all legal, health and warranty consequences that may be incurred.

**Step 1**: Clear your Firearm - Check the chamber, bolt face and magazine well.

Step 2: Gather Parts and Tools Needed.

- M\*Carbo Browning AB3 Trigger Spring Kit.
- .050" Hex Key
- 5/32" Allen Key
- Needle Nose Pliers
- Flat-head Screwdriver
- 1/16" Punch
- Eye protection



**Step 3**: Take a few factory trigger pull readings. Then beginning by removing the bolt, push the bolt stock release.



**Step 4**: Remove the Front(shorter) and Rear(longer) takedown screws.





Download or Print Instructions | Contact: help@mcarbo.com | Page 2







You must be 18 yrs of age to purchase. We advise that all parts purchased from our inventory be installed and inspected by a qualified gunsmith. Modifying your weapon may be prohibited in your state. Do not modify your sear or hammer engagement surfaces. Before installing please be sure to check all local state and federal laws. By installing this part you agree to take full responsibility for any and all legal, health and warranty consequences that may be incurred.

**Step 5**: Separate the stock from the receiver. Pull up and out.



**Step 6**: Now we want to remove the factory trigger sear spring.



(Replace it with the M\*CARBO Spring Kit using the flathead.)



**Step 7**: Pre-travel adjustment. Use the .050 Allen Key to tighten up to your desired amount of travel.






Download or Print Instructions | Contact: help@mcarbo.com | Page 3



You must be 18 yrs of age to purchase. We advise that all parts purchased from our inventory be installed and inspected by a qualified gunsmith. Modifying your weapon may be prohibited in your state. Do not modify your sear or hammer engagement surfaces. Before installing please be sure to check all local state and federal laws. By installing this part you agree to take full responsibility for any and all legal, health and warranty consequences that may be incurred.






**Step 9**: Screw back on the front screw(shorter) and then place the trigger guard back in. Then tighten back in the screw in the back(longer).



Step 10: Insert the bolt back in and hit the bolt stop.



**Step 11**: Do a quick function check then place the weapon on safe then pull the trigger and nothing should happen.

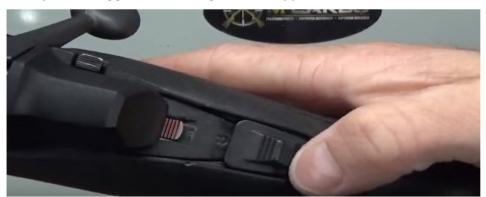



Download or Print Instructions | Contact: <a href="mailto:help@mcarbo.com">help@mcarbo.com</a> | Page 4

You must be 18 yrs of age to purchase. We advise that all parts purchased from our inventory be installed and inspected by a qualified gunsmith. Modifying your weapon may be prohibited in your state.

Do not modify your sear or hammer engagement surfaces. Before installing please be sure to check all local state and federal laws. By installing this part you agree to take full responsibility for any and





Step 12: Take off the safety lock, then pull the trigger again.

all legal, health and warranty consequences that may be incurred.



**Step 13**: Try a few trigger pull readings and the M\*Carbo Spring Kit should reduce your trigger pull by half and improve accuracy.



#### **Before** installing Browning AB3 Trigger Spring Kit



After installing Browning AB3 Trigger Spring Kit.

\*\*\*The Browning AB3 Trigger Spring Kit should reduce the trigger pull by about 50%

